

Amana® Commercial

Project #: _____

Item #: _____

A/A File #:

Specification #:



Model RMS10T and RMS10TS shown

Low Volume

This category of microwave is ideal for...

Applications:

- Convenience stores
- Dessert stations
- Nurses stations
- Teachers/Staff lounge



All ACP, Inc. commercial ovens are backed by our Culinary Center. Call us with any question regarding food preparation, menu development and cooking times. 866-426-2621.

Low Volume

Amana Commercial Microwave Model RMS10T and RMS10TS

Power Output

- 1000 watts of power.
- Five power levels for cooking flexibility.
- Three cooking stages for one touch cooking.

Certified Oven for Commercial Applications

- Tested to higher standards for a commercial rating - required by most commercial insurance policies and health inspectors.
- Interlock safety switch is tested to 4 times the standard of residential ovens.
- Constructed to withstand the foodservice environment, multiple users and variable ambient temperatures.
- Compared to a residential oven, this oven is more powerful for faster heating and better quality results.
- Engineered for a simple, "self-service" operation.

Easy to Use


- Perfect replacement for inappropriate domestic ovens used in a foodservice applications.
- Touch controls are perfect for self-service locations.
- 20 programmable menu items simplifies cooking.
- Multiple quantity pad calculates the proper cooking times for multiple portions.
- Braille touch pads are ADA compliant.
- See-through door and lighted interior for monitoring without opening the door.
- 0.9 cubic foot (.025m³) capacity accommodates a 12" (305mm) platter, prepackaged foods and single servings.

Easy to Maintain

- RMS10T - Stainless steel exterior wrap and painted interior for easy cleaning.
- RMS10TS - Stainless steel exterior wrap and oven interior for increased durability.
- Sealed in ceramic shelf for easy cleaning.
- Limited 3 year warranty.
- Backed by the ACP, Inc. 24/7 ComServ Support Center, 866-426-2621.
- UL and ETL Listed.



Amana Commercial Microwave Model RMS10T and RMS10TS | Low Volume

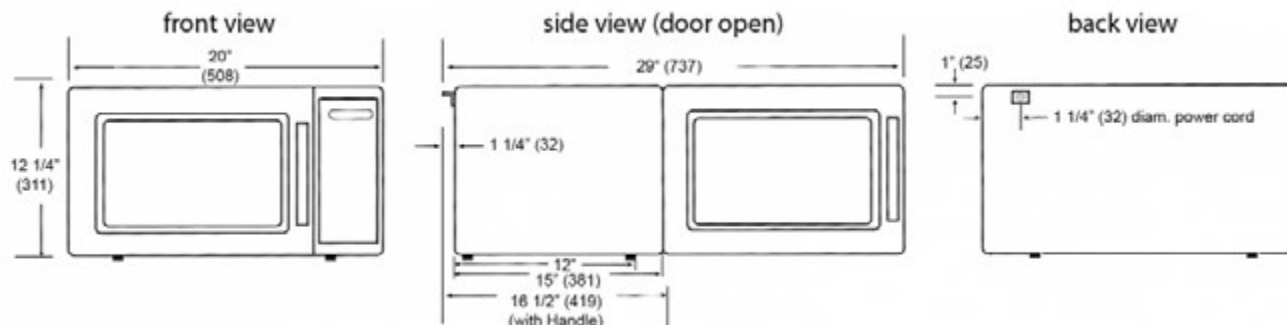

Installation clearance: 3" all sides

Drawings available from KCL CADlog - techs@kclcad.com

Specifications

| | | |
|---------------------------|---|------------------------------|
| Model | RMS10T | UPC Code 728028020793 |
| | RMS10TS | UPC Code 728028020809 |
| Configuration | Countertop | |
| Control System | Touch | |
| Programmable Control Pads | 10 | |
| Settings Programmable | 20 | |
| Max. Cooking Time | 60:00 | |
| Power Levels | 5 | |
| Defrost | Yes | |
| Time Entry Option | Yes | |
| Microwave Distribution | Rotating stirrer, bottom | |
| Magnetron | 1 | |
| Display | LED | |
| Stage Cooking | Yes, 3 | |
| Interior Light | Yes | |
| Door Handle | Grab & Go | |
| Signal | End of cycle, adjustable | |
| Exterior Dimensions | H 12 1/4" (311.15) W 20" (508) | D* 16 1/2" (419) |
| Cavity Dimensions | H 7 3/4" (196.85) W 13" (330.2) | D 13" (330.2) |
| Door Depth | 29 1/2" (749.3), 90°+ door open | |
| Usable Cavity Space | 0.9 cubic ft. (.025m ³) | |
| Exterior Finish | RMS10T & RMS10TS: Stainless steel wrap | |
| Interior Finish | RMS10T: Painted RMS10TS: Stainless steel | |
| Power Consumption | 1150 W, 9.6 A | |
| Power Output** | 1000 W** Microwave | |
| Power Source | 120V, 60 Hz, 15 A single phase | |
| Plug Configuration / Cord | NEMA 5-15 | 5 ft. (1.5m) (11) |
| Frequency | 2450 MHz | |
| Product Weight | 32 lbs. (14.5 kg.) | |
| Ship weight (approx.) | 39 lbs. (17.7 kg.) | |
| UPS Shippable | Yes | |
| Shipping Carton Size | H 15" (381) | W 23" (584.19) D 18" (457.2) |

Specifications

Commercial microwave 10 touch pad control panel shall be programmable with the ability to program up to 20 menu items. Touch pad shall include Braille for ADA compliance. Cooking timer shall be 60 minute countdown style for all power settings with a time entry option and an end of cycle audible signal. LED display shall be backlit. Oven shall have 5 power levels and 3 cooking stages. Microwave output shall be 1000 watts distributed by one magnetron with a bottom feed rotating stirrer to provide superior even heating throughout the cavity. Durable door shall have a tempered glass window and a grab and go handle with a 90°+ opening for easy access. An interior light shall facilitate monitoring without opening the door. The 0.9 cubic ft. (.025 m³) cavity shall accommodate a 12" (305 mm) platter. Oven shall have a stainless steel exterior wrap and a white powder coat painted interior (RMS10T) or stainless steel interior (RMS10TS). Microwave oven shall comply with standards set by the U.S. Department of Health and Human Services, UL for safety and ETL for sanitation.



Warranty

Limited 3 year warranty:
Year 1 - parts, labor, and travel are covered.
Years 2 - 3 - magnetron tube (part only) is covered.

Service

All products are backed by the ACP, Inc. 24/7 ComServ Support Center.



Measurements in () are millimeters

* Includes handle

**IEC 705 Tested

